ALCOTEST 9510 PARAMETER REPORT

Equipment Serial No.:

Serial No.: Firmware: WinCE application: Configuration: ARMK-0265 8326739 1.5 8326738 2.9 8326737 3.10

Date: Time:

01/08/2025 09:47:20

Parameter

Parameter min. blow time min. breath volume for females of ag min. breath volume for all other	e 60+	5.0 1.2	s L
min. blow flow		1.5 4.5	L L/min
plateau detection limit		4	%
plateau detection start conc.		70	microgram/L
neg. flow detection (part. vacuum) neg. flow detection sensitivy		10.0 10	hPa
cal. gas abort volume		0.4	L
result-to-zero limit		0.0050	%BAC
ambient air check limit		0.0049	%BAC
interference det. d-criterion limit abs. interference det. d-criterion limit rel. interference det. t-criterion limit abs. interference det. t-criterion limit rel.		38 10.0 8 2.1	microgram/L % microgram/L %
IR CO2 offset IR H2O offset EC H2O offset		10 4 0	microgram/L microgram/L microgram/L
Value-based EC aging comp. on/off (1/0)	0	
Time-based EC aging comp. on/off (1	/0)	1	
Time-based EC aging comp. per mon	th	0.2	%
Time-based EC aging comp. maximu	m	3.0	%
EC fatigue comp. max. sum EC fatigue comp. factor EC fatigue comp. minutes		15000 50 180	
mouth alc. mark limit mouth alc. lower limit mouth alc. slope mouth alc. zero limit mouth alc. max. neg. sum		500 30 6 50 6	
mouth alc. max. 2nd derivative		35	

ALCOTEST 9510 CERTIFICATION REPORT - WET ADJUST (PART I) Seaside Heights

Equipment

Inst. Model No.: Firmware:

ALCOTEST 9510 Serial No.: 8326739 1.5

Config.:

ARMK-0265

8326737 3.10

WinCE:

8326738 2.9

Wet Adjust Record

Wet Adjust File No.: 144

Wet Adjust Date: Wet Adjust Time: 01/08/2025 10:39:13

Wet Adjust No.:

Concentration: Adjusting Unit:

Solution Lot No.:

0.100 %

X-Cal 2000 23240

Adj. Unit Ser. No.: Soln. Bottle No.:

ARMN-0039

833

Adj. Unit Exp.:

10/04/2025 Adjust Soln. Exp.: 06/28/2025

Preadjust Simulator Temp.: Postadjust Simulator Temp.:

34.00 degree C 34.00 degree C

Result

Procedure completed successfully.

Coordinator

Last Name: Bellay -

First Name: David

MI: M.

Badge No.: 8112

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

TE OSAM SIL

Signed:

Date: 01/08/2025

ALCOTEST 9510 CERTIFICATION REPORT - DRY ADJUST (PART II) Seaside Heights

Equipment Inst. Model No.: Firmware:

ALCOTEST 9510 Serial No.: 8326739 1.5 Config.:

ARMK-0265

8326737 3.10

WinCE:

8326738 2.9

Dry Adjust Record

Dry Adjust File No.: 145

Dry Adjust Date:

01/08/2025 11:06:55

Dry Adjust No.:

Concentration: Dry Gas Lot No .: 0.100 %

302-402448282

Adjust Gas Exp.: Mensor CPG2300 Barom. Serial No.:

Dry Adjust Time:

05/20/2025

41001RDH

Barom. Cert. Exp.:09/26/2025

Barom. Model No.: Pre-adjust Amb. Pressure:

1015 hPa

Post-adjust Amb. Pressure:

1015 hPa

Result

Procedure completed successfully.

Coordinator

Last Name: Bellay -

First Name: David

MI: M.

Badge No.: 8112

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

The Oalloty 8112

Signed:

Date: 01/08/2025

ALCOTEST 9510 CERTIFICATION REPORT - LINEARITY (PART III) Seaside Heights

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMK-0265

Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9

Linearity Record

Linearity File No.: 146 Lin. Date: 01/08/2025 Lin. No.: 4

 0.040% Dry Gas Lot No.:
 302-402755169
 Adjust. Gas Exp.:
 05/25/2026

 0.080% Dry Gas Lot No.:
 302-402477284
 Adjust. Gas Exp.:
 06/27/2025

 0.160% Dry Gas Lot No.:
 302-402486005
 Adjust. Gas Exp.:
 07/13/2025

 0.300% Dry Gas Lot No.:
 302-402759888
 Adjust. Gas Exp.:
 05/31/2026

Data Summary

Data Summary				
Function	Result	Time	Barometric	Comment(s)
	<u>%BAC</u>	_hh:mm:ss	Pres. [hPa]	or Status Code
Ambient Air Blank	0.000	11:27:44		*TEST PASSED*
Control .04 Test 1 EC	0.038	11:28:19	1015	*TEST PASSED*
Control .04 Test 1 IR	0.039	11:28:19	1015	*TEST PASSED*
Ambient Air Blank	0.000	11:29:25		*TEST PASSED*
Control .04 Test 2 EC	0.039	11:29:36	1015	*TEST PASSED*
Control .04 Test 2 IR	0.039	11:29:36	1015	*TEST PASSED*
Ambient Air Blank	0.000	11:31:06	-	*TEST PASSED*
Control .08 Test 3 EC	0.078	11:31:40	1015	*TEST PASSED*
Control .08 Test 3 IR	0.079	11:31:40	1015	*TEST PASSED*
Ambient Air Blank	0.000	11:32:54		*TEST PASSED*
Control .08 Test 4 EC	0.080	11:33:06	1015	*TEST PASSED*
Control .08 Test 4 IR	0.080	11:33:06	1015	*TEST PASSED*
Ambient Air Blank	0.000	11:35:15		*TEST PASSED*
Control .16 Test 5 EC	0.154	11:35:49	1015	*TEST PASSED*
Control .16 Test 5 IR	0.157	11:35:49	1015	*TEST PASSED*
Ambient Air Blank	0.000	11:37:10		*TEST PASSED*
Control .16 Test 6 EC	0.158	11:37:23	1015	*TEST PASSED*
Control .16 Test 6 IR	0.158	11:37:23	1015	*TEST PASSED*
Ambient Air Blank	0.000	11: 44 :15		*TEST PASSED*
Control .30 Test 7 EC	0.297	11:44:51	1014	*TEST PASSED*
Control .30 Test 7 IR	0.302	11:44:51	1014	*TEST PASSED*
Ambient Air Blank	0.000	11:46:19		*TEST PASSED*
Control .30 Test 8 EC	0.303	11:46:32	1014	*TEST PASSED*
Control .30 Test 8 IR	0.305	11:46:32	1014	*TEST PASSED*
Ambient Air Blank	0.000	11:47:08		*TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Bellay - First Name: David MI: M. Badge No.: 8112

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

TIN O /4 1872

Signed:

Date: 01/08/2025

ALCOTEST 9510 CYLINDER INSTALLATION REPORT - INLET 1 Seaside Heights SERIAL NUMBER: ARMK-0265

Equipment Inst. Model No.: Firmware:

ALCOTEST 9510 Serial No.:

ARMK-0265

WinCE:

8326738 2.9

Cyl1 Install File No.: 111

8326739 1.5

Config.: Cyl1 Install Date: 8326737 3.10 07/29/2024

Cyl1 Install No.:

Control Tests (0.100%)

Installation Inlet: Dry Gas Lot No .: #1 (Upper) 302-402843436

Post test active Cyl.: #2 (Lower)

09/08/2026

Dry Gas Lot Exp.:

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank Control Test 1	0.000	10:17:45	1016	*TEST PASSED* *TEST PASSED*
EC Result IR Result	0.097 0.100	10:18:31 10:18:31		*TEST PASSED*
Ambient Air Blank Control Test 2	0.000	10:19:43	1010	*TEST PASSED* *TEST PASSED*
EC Result IR Result	0.100	10:20:07	1016	*TEST PASSED* *TEST PASSED*
Ambient Air Blank	0.100 0.000	10:20:07 10:21:21		*TEST PASSED* *TEST PASSED*
Control Test 3 EC Result IR Result	0.100 0.100	10:21:45 10:21:45	1016	*TEST PASSED* *TEST PASSED*
Ambient Air Blank	0.000	10:22:17		*TEST PASSED* *TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Waldrop -

First Name: Robert

MI: W

Badge No.: 8256

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

Signed:

Date: 07/29/2024

ALCOTEST 9510 CYLINDER INSTALLATION REPORT - INLET 2 Seaside Heights SERIAL NUMBER: ARMK-0265

Equipment

inst. Model No.: Firmware:

ALCOTEST 9510 Serial No.:

ARMK-0265

WinCE:

Cyl2 Install File No.: 27

8326739 1.5

Config.: Cyl2 install Date:

8326737 3.10 12/04/2023

Cyl2 Install No.:

8326738 2.9

Control Tests (0.100%)

Installation Inlet: Dry Gas Lot No.: #2 (Lower) 302-402755079

Post test active Cyl.: #1 (Upper) Dry Gas Lot Exp.:

05/31/2026

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank Control Test 1	0.000	09:55:21	1010	*TEST PASSED*
EC Result IR Result	0.099 0.100	09:56:07 09:56:07	1010	*TEST PASSED* *TEST PASSED*
Ambient Air Blank Control Test 2	0.000	09:57:11	1010	*TEST PASSED* *TEST PASSED*
EC Result IR Result	0.100 0.100	09:57:35 09:57:35	1010	*TEST PASSED* *TEST PASSED*
Ambient Air Blank Control Test 3	0.000	09:58:39	1010	*TEST PASSED* *TEST PASSED*
EC Result IR Result	0.101 0.1 01	09:59:03 09:59:03	1010	*TEST PASSED* *TEST PASSED*
Ambient Air Blank	0.000	09:59:26		*TEST PASSED* *TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Lutz -

First Name: Dennis

MI: J

Badge No.: 7045

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

Signed:

Date: 12/04/2023

TP-I QUAT 7045

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036

DRAEGER MEDICAL SYSTEMS INC

Sales order: 1123816776 Date: September 18, 2023

METHOD OF ANALYSIS:

IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY:

+/-0.002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#: 302-402843436

ETHANOL IN NITROGEN

Product Expiration: September 08, 2026

COMPONENT	PPM	(BrAC)
ETHANOL NITROGEN	260.5PPM BAL	(0.100)
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	263.3	(0.101)
REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

^{*} CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673

Analytical

Analytical instruments Calibrated Using NMI Traceable Standards. Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NiST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: September 08, 2023

APPROVED BY:

"We certify that all the cylinders for the Lot numbers identified herin are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

CERTIFICATE OF ANALYSIS EBS - ETHANOL BREATH STANDARD

DRAEGER MEDICAL SYSTEMS INC.:

Sales order: 1121656187 Date: June 30, 2023

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: +/-0.002 BrAC & +/-2% whichever is greater.

CALGAZ LOT#: 302-402755079

ETHANOL IN NITROGEN

Product Expiration: May 31, 2026

	000000000				
. :	COMPONENT	PPM	(BrAC)		
•.	ETHANOL NITROGEN	260.6PPM BAL	(0.100)		
	AVERAGE ANALYTICAL VALUE	PPM	(BrAC)		
	ETHANOL	262.5	(0.101)		
REF	ERENCE STANDARD	CYLINDER	CONCENTRATION PPM		
M,M	I. TRACEABLE STANDARDS*	ND38424	260.7		

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical Instruments Calibrated Using NMI Traceable Standards. Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.


"NMI is recognized by NIST through the Motual Recognition Agreement (CIPM MRA). CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath sicohol testers.

Manufactured Date: May 31, 2023

APPROVED BY

"We certify that all the cylinders for the Lot numbers identified herriand chemical test reports are on file and copies will be furtished upon request." CFR 49 part 178.65 and that physical

> CALGAZ, a division of Airgas USA LLC 821 Chesapeake Drive, Cambridge, MD 21613-0149 Phone: (410) 228-6400 Fax: (410) 228-4251

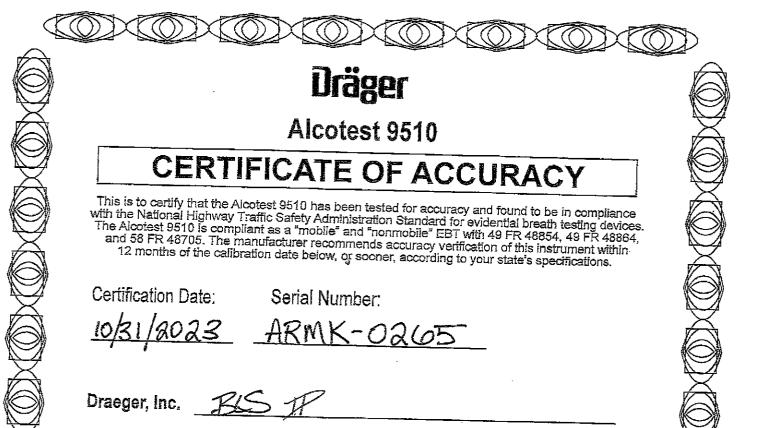



State of New Jersey

PHILIP D. MURPHY

Governor

TAHESHA L. WAY

OFFICE OF THE ATTORNEY GENERAL
DEPARTMENT OF LAW AND PUBLIC SAFETY
DIVISION OF STATE POLICE
POST OFFICE BOX 7068
WEST TRENTON, NJ 08628-0068
(609) 882-2000

MATTHEW J. PLATKIN
Attorney General

COLONEL PATRICK J. CALLAHAN
Superintendent

CERTIFICATION OF ANALYSIS 0.100 PERCENT BREATH ALCOHOL SIMULATOR SOLUTION

ACCEPTANCE SPECIFICATIONS FOR BREATH ALCOHOL SIMULATOR SOLUTION: Ethyl alcohol concentration within, but not exceeding, the range of 0.1174 to 0.1246 grams per 100 milliliters of solution.

MANUFACTURER: Draeger, Inc.

ANALYSIS DATE: 09/13/2023

BREATH ALCOHOL SIMULATOR SOLUTION LOT NUMBER: 23240

Representative samples of the above-referenced Lot Number were tested by Gas Chromatography and found to have a mean ethyl alcohol concentration range of <u>0.1196</u> to <u>0.1212</u> grams per 100 milliliters of solution.

This lot of breath alcohol simulator solution may be utilized as a known traceable standard for the purpose of conducting periodic tests, pursuant to N.J.A.C. 13:51-4.3, of approved breath test instruments (N.J.A.C. 13:51-3.5) utilized by law enforcement agencies in this State. The manufacturer's expiration date for this lot of breath alcohol simulator solution is June 28, 2025.

As OFS Director for the Division of State Police, I hereby certify and attest that the tests and results documented in this Certificate of Analysis were performed at the Office of Forensic Sciences of the Division of State Police on properly functioning and calibrated instruments and equipment. All procedures utilized are accurate, objective, and performed on a routine basis by personnel within the Office of Forensic Sciences, in accordance with their professional duties and responsibilities.

Michael Kennedy OFS Director

NJSP Office of Forensic Sciences

Swern to and subscribed before me this 15 day of Suptember 202

Notary

KAREN E. STAHL
NOTARY PUBLIC OF NEW JERSEY
Commission # 50110522
My Commission Expires 8/13/2024



"An Internationally Accredited Agency"

New Jersey Is An Equal Opportunity Employer Printed on Recycled Paper and Recycloble





Customer: DRAEGER INC

7256 S SAM HOUSTON PKWY W

STE 100

HOUSTON, TX 77085

PO Number: S1O4303440829

Certificate/SO Number: 5-F2R0O-120-1 Revision 0

Manufacturer: Drager Safety AG & Co. KGaA

Model Number: X-Cal 2000

Description: Breath Alcohol Simulator

Serial Number: ARMN-0039

ID: NONE

As-Found: In Tolerance

As-Left: In Tolerance

Issue Date: Oct 04, 2024

Calibration Date: Oct 04, 2024

Due Date: Oct 04, 2025

Calibrated To: Customer Spec

Calibration Procedure: 1-AC103519-1

Transcat Calibration Laboratories have been audited and found in compliance with ISO/IEC 17025:2017. Accredited calibrations performed within the Lab Scope of Accreditation are indicated by the presen Logo and Certificate Number. Any measurements on an accredited calibration not covered by the Lab Scope of Accreditation are listed in the notes section of the certificate. SCC, NRC, CLAS or ANAB do r of an individual calibration by accredited laboratories.

Transcat calibrations, as applicable, are performed in compliance with the requirements of the Transcat Quality Manual QAC-P01-000, the customer Purchase Order and/or Quality Agreement requirements, Z540.1-1994 (R2002), and ISO 10012:2003, as applicable. When specified contractually, the requirements of ISO TS16949:2009, 10CFR21, 10CFR50 App. B, ASME NQA-1:2012, and ANSI/NCSL Z540.3-covered.

Complete records of work performed are maintained by Transcat and are available for inspection. Laboratory standards used in the performance of this calibration are listed on this certificate.

Transcat documents the traceability of measurements to the SI units through the National Institute of Standards and Technology (NIST), or the National Research Council of Canada (NRC), or other national (NMI) that are signatories to the CIPM Mutual Recognition Arrangement, or accepted fundamental and/or natural physical constants, or by the use of specified methods, consensus standards or ratio type mocumentation supporting traceability information is available for review upon written request at a Transcat facility. The measured quantity and the measurement uncertainty are required for further dissemination.

Uncertainties are reported with a coverage factor k=2, providing a level of confidence of approximately 95%. All calibrations have been performed using processes having a TUR of 4:1 or better (3:1 for mass otherwise noted. The Test Uncertainty Ratio (TUR) is calculated in accordance with NCSL International RP-18. For mass calibrations: Conventional mass referenced to 8.0 g/cm³.

The results in this report relate only to the item calibrated or tested. Recorded calibration data is valid at the time of calibration within the stated uncertainties at the environmental conditions noted. The determines the specification is specific to the model/serial no./ID no. referenced above based on the tolerances shown; these tolerances are either the original equipment manufacturers (OEM's) warranted specifications specifications. Any number of factors can cause a unit to drift out of tolerance at any time following its calibration. Limitations on the uses of this instrument are detailed in the OEM's operating instructions. be reproduced except in full, without the written approval of Transcat. Additional information, if applicable may be included on separate report(s).

Date Received: October 01, 2024

Service Level: R9

Certificate - Page 1 of 5



Customer: DRAEGER INC

7256 S SAM HOUSTON PKWY W

STE 100

HOUSTON, TX 77085

PO Number: \$104303440829

Certificate/SO Number: 5-F2R0O-120-1 Revision 0

As Found/As Left Data

Description	Setpoints	Accuracy	Low Limit	High Limit	As Found / As Left	0 0 T	Cal Proces Uncertaint (k=2; ±)
Function Checks					 -	_	(AC 23 27
Bubble Check Seal Check Temperature Source: Accuracy			P P	P	P Daniel de P	745 (1) 245 (8)	
Accuracy Test	34.00°C	±(0.02 °C)	33.98	34.02	34.00 °C		1.5e-002
Temperature Source: Stability T	est						
Stability Test	0.00°C	±(0.02 °C)	-0.02	0.02	0.00°C		5.0e-003

Traceable Standards

Asset	Manufacturer	Model Number	Description	Cal Date	Due Date
05H1431	AccuMac Corporation	AM1760	Secondary SPRT	12-Feb-24	28-Feb-25
HP927312	Hart Scientific/Fluke	1575	Super Thermometer	10-Jul-24	31-Jan-26

The use of the standard is defined as: AF - used for as-found readings, AL - used for as-left readings.

Environmental Data

Temperature	Relative Humidity	Temp / RH Asset	Lab Area
70.60°F /21.44°C	53.90%	DewK5	G

Decision Rule

When compliance statements are present, they are reported without factoring in the effects of uncertainty and comply with the guidelines as follows: The acceptance to the high limit, and/or greater than or equal to the low limit. The rejection zones are defined as greater than the high limit and/or less than the low limit. Single measures

Date Received: October 01, 2024

Service Level: R9

Certificate - Page 2 of 5



Customer: DRAEGER INC

7256 S SAM HOUSTON PKWY W

STE 100

HOUSTON, TX 77085

PO Number: \$104303440829

Certificate/SO Number: 5-F2R0O-120-1 Revision 0

are identified as in-tolerance. Single measurement results in the rejection zone are identified as out-of-tolerance (OOT). When all measurement results are in the measurements, for the same characteristic, the test is identified as in-tolerance. For repeated characteristic measurements, a single measurement result in the rejection identified as out-of-tolerance (OOT). Data rejection for cause, (outliers) is permitted after the "Determining and Verifying Out Of Tolerance (OOT) and/or Op Fail R document has been completed and the anomalous reading cannot be repeated, and the anomalous reading does not represent the system under test. Staten

Date Received: October 01, 2024

Service Level: R9

Certificate - Page 3 of 5



Customer: DRAEGER INC

7256 S SAM HOUSTON PKWY W

STE 100

HOUSTON, TX 77085

PO Number: \$104303440829

Certificate/SO Number: 5-F2R0O-120-1 Revision 0

	Legend
Topic	Description
Accuracy	UUT specification that establishes expected tolerances and a time limit (calibration interval) over which the instrument is expected to hold the
As Found	Initial measurement results
As Left	Measurement results after adjustment and/or repair
Blank Data Field	Test is not applicable for the UUT
Cal Process Uncertainty (CPU)	The uncertainty of calibration process for the reported measurement result
Calibration Date	Indicates the date that the calibration was completed
Cover Factor (k)	A measure of uncertainty that defines an interval about the measurement result
Due Date	Indicates the end of the calibration cycle as requested by the customer
Issue Date	Indicates the date that the calibration has passed the Data Review Process and was signed by an authorized signatory or the date that a revi has been issued
Low / High Limits	Establishes UUT acceptable performance limits for the test measurement
Measurement Uncertainty	The dispersion of the values attributed to a measured quantity
OOA	Out of Acceptance (#)
OOT	Out of Tolerance (*)
Setpoints	Measurement target values
Traceability	Unbroken chain of comparisons relating an instrument's measurements to a known standard(s)
Traceability Number	Unique identifier(s) used to document traceability of calibration standards
TUR	Test Uncertainty Ratio, ratio of the tolerance or specification of the test measurement in relation to the uncertainty in measurement results
UUT	Unit Under test

Date Received: October 01, 2024

Service Level: R9

Certificate - Page 4 of 5



Customer: DRAEGER INC

7256 S SAM HOUSTON PKWY W

HOUSTON, TX 77085

PO Number: \$104303440829

Certificate/SO Number: 5-F2R0O-120-1 Revision 0

Calibrated At: 16115 Park Row Houston, TX 77084

Facility Responsible: 16115 Park Row Houston, TX 77084 800-828-1470

Date Received: October 01, 2024

Service Level: R9

Jose Martinez

Calibrated By:

Jose Martinez

Oct 04, 2024

Calibration Technician

Electronically Signed By:

02:35:04 -04:0

Certificate - Page 5 of 5



Customer: DRAEGER INC

7256 S SAM HOUSTON PKWY W

STE 100

HOUSTON, TX 77085

PO Number: S1O4303405716

Certificate/SO Number: 5-F2D8A-40-1 Revision 0

Manufacturer: Wika Instr/Mensor Corp/Trend

Model Number: CPG2300

Description: Portable Barometer

Serial Number: 41001RDH

ID: NONE

As-Found: In Tolerance

As-Left: In Tolerance

Issue Date: Sep 27, 2024

Calibration Date: Sep 26, 2024

Due Date: Sep 26, 2025

Calibrated To: Manufacturer Si

Calibration Procedure: 1-AC94879-0

Transcat Calibration Laboratories have been audited and found in compliance with ISO/IEC 17025:2017. Accredited calibrations performed within the Lab Scope of Accreditation are indicated by the presen Logo and Certificate Number. Any measurements on an accredited calibration not covered by the Lab Scope of Accreditation are listed in the notes section of the certificate. SCC, NRC, CLAS or ANAB do r of an individual calibration by accredited laboratories.

Transcat calibrations, as applicable, are performed in compliance with the requirements of the Transcat Quality Manual QAC-P01-000, the customer Purchase Order and/or Quality Agreement requirements, Z540.1-1994 (R2002), and ISO 10012:2003, as applicable. When specified contractually, the requirements of ISO TS16949:2009, 10CFR21, 10CFR50 App. B, ASME NQA-1:2012, and ANSI/NCSL Z540.3-covered.

Complete records of work performed are maintained by Transcat and are available for inspection. Laboratory standards used in the performance of this calibration are listed on this certificate.

Transcat documents the traceability of measurements to the SI units through the National Institute of Standards and Technology (NIST), or the National Research Council of Canada (NRC), or other national (NMI) that are signatories to the CIPM Mutual Recognition Arrangement, or accepted fundamental and/or natural physical constants, or by the use of specified methods, consensus standards or ratio type mocumentation supporting traceability information is available for review upon written request at a Transcat facility. The measured quantity and the measurement uncertainty are required for further disseminations.

Uncertainties are reported with a coverage factor k=2, providing a level of confidence of approximately 95%. All calibrations have been performed using processes having a TUR of 4:1 or better (3:1 for mass otherwise noted. The Test Uncertainty Ratio (TUR) is calculated in accordance with NCSL International RP-18. For mass calibrations: Conventional mass referenced to 8.0 g/cm².

The results in this report relate only to the item calibrated or tested. Recorded calibration data is valid at the time of calibration within the stated uncertainties at the environmental conditions noted. The deta the specification is specific to the model/serial no./ID no. referenced above based on the tolerances shown; these tolerances are either the original equipment manufacturers (OEM's) warranted specification specifications. Any number of factors can cause a unit to drift out of tolerance at any time following its calibration. Limitations on the uses of this instrument are detailed in the OEM's operating instructions, be reproduced except in full, without the written approval of Transcat. Additional information, if applicable may be included on separate report(s).

Date Received: September 03, 2024

Service Level: R9

Certificate - Page 1 of 5



Customer: DRAEGER INC

7256 S SAM HOUSTON PKWY W

STE 100

HOUSTON, TX 77085

PO Number: S1O4303405716

Certificate/SO Number: 5-F2D8A-40-1 Revision 0

As Found/As Left Data

Description	Setpoints	Accuracy	Low Limit	High Limit	As Found / As Left	O Cal Proces O Uncertaint T (k=2; ±)
Pressure Measure: 8 to 17 psia F	Range					, , , , , ,
	7.985psia	±(0.015% FS)	7.982	7.988	7.985 psia	1.5e-004
	8.857psia	±(0.015% FS)	8.854	8.860	8.856 psia	1.7e-004
	9.731psia	±(0.015% FS)	9.728	9.734	9.731 psia	1.8e-004
	10.628psia	±(0.015% FS)	10.625	10.631	10.627 psia	2.0e-004
men	11.647psia	±(0.015% FS)	11.644	11.650	11.647 psia	2.2e-004
	12.523psia	±(0.015% FS)	12.520	12.526	12.523 psia	2.4e-004
Phonon management of the commence of the comme	13.396psia	±(0.015% FS)	13.393	13.399	13.395 psia	2.5e-004
	14.269psia	±(0.015% FS)	14.266	14.272	14.269 psia	2.7e-004
	15.270psia	±(0.015% FS)	15.267	15.273	15.269 psia	2.9e-004
	16.145psia	±(0.015% FS)	16.142	16.148	16.145 psia	3.1e-004
starts to write execution of concern a community and	17.020psia	±(0.015% FS)	17.017	17.023	17.019 psia	3.2e-004
	13.396psia	±(0.015% FS)	13:393	13,399	13.395 psia	2.5e-004
age for the depth of elements, he paying the second	12.523psia	±(0.015% FS)	12.520	12.526	12.523 psia	2.4e-004
	11.647psia	±(0.015% F\$)	11.644	11.650	11.647 psia	2.2e-004

Date Received: September 03, 2024

Service Level: R9

Certificate - Page 2 of 5



Customer: DRAEGER INC

7256 S SAM HOUSTON PKWY W

STE 100

HOUSTON, TX 77085

PO Number: S104303405716

Certificate/SO Number: 5-F2D8A-40-1 Revision 0

Traceable Standards

Asset	Manufacturer	Model Number	Description	Cal Date	Due Date
DW09BA	Fluke/DH Instruments	PG7601	Piston Gauge	11-Sep-23	30-Sep-24
DW09CA	DH Instruments	MS-AMH-38	AMH Mass Set	13-Sep-24	13-Dec-24
DW09LOW	Fluke/DH Instruments	PC-7100/7600-10-TC	Gas Piston-Cylinder Module	22-Aug-23	31-Aug-28
DW09MASS	Fluke/DH Instruments	MS-AMH-38	AMH Mass Set	1-Feb-24	30-Nov-24

The use of the standard is defined as: AF - used for as-found readings, AL - used for as-left readings.

Environmental Data

Temperature	Relative Humidity	Temp / RH Asset	Lab Area
71.20°F /21.78°C	42.50%	DewK8	В

Decision Rule

When compliance statements are present, they are reported without factoring in the effects of uncertainty and comply with the guidelines as follows: The acceptance to the high limit, and/or greater than or equal to the low limit. The rejection zones are defined as greater than the high limit and/or less than the low limit. Single measure are identified as in-tolerance. Single measurement results in the rejection zone are identified as out-of-tolerance (OOT). When all measurement results are in the measurements, for the same characteristic, the test is identified as in-tolerance. For repeated characteristic measurements, a single measurement result in the rejection tidentified as out-of-tolerance (OOT). Data rejection for cause, (outliers) is permitted after the "Determining and Verifying Out Of Tolerance (OOT) and/or Op Fail R document has been completed and the anomalous reading cannot be repeated, and the anomalous reading does not represent the system under test. Staten

Date Received: September 03, 2024

Service Level: R9

Certificate - Page 3 of 5
Reprinted on October 17, 2024



Customer: DRAEGER INC

7256 S SAM HOUSTON PKWY W

STE 100

HOUSTON, TX 77085

PO Number: \$104303405716

Certificate/SO Number: 5-F2D8A-40-1 Revision 0

	Legend
Topic	Description
Accuracy	UUT specification that establishes expected tolerances and a time limit (calibration interval) over which the instrument is expected to hold the
As Found	Initial measurement results
As Left	Measurement results after adjustment and/or repair
Blank Data Field	Test is not applicable for the UUT
Cal Process Uncertainty (CPU)	The uncertainty of calibration process for the reported measurement result
Calibration Date	Indicates the date that the calibration was completed
Cover Factor (k)	A measure of uncertainty that defines an interval about the measurement result
Due Date	Indicates the end of the calibration cycle as requested by the customer
Issue Date	Indicates the date that the calibration has passed the Data Review Process and was signed by an authorized signatory or the date that a revi
Low / High Limits	Establishes UUT acceptable performance limits for the test measurement
Measurement Uncertainty	The dispersion of the values attributed to a measured quantity
OOA	Out of Acceptance (#)
ООТ	Out of Tolerance (*)
Setpoints	Measurement target values
Traceability	Unbroken chain of comparisons relating an instrument's measurements to a known standard(s)
Traceability Number	Unique identifier(s) used to document traceability of calibration standards
TUR	Test Uncertainty Ratio, ratio of the tolerance or specification of the test measurement in relation to the uncertainty in measurement results
UUT	Unit Under test

Date Received: September 03, 2024

Service Level: R9

Certificate - Page 4 of 5



Customer: DRAEGER INC

7256 S SAM HOUSTON PKWY W

STE 100

HOUSTON, TX 77085

PO Number: \$104303405716

Certificate/SO Number: 5-F2D8A-40-1 Revision 0

Calibrated At: 16115 Park Row Houston, TX 77084

Facility Responsible: 16115 Park Row Houston, TX 77084 800-828-1470

Unit Barcode:

Date Received: September 03, 2024

Service Level: R9

Calibrated By:

Electronically Signed By: Alex Spilker

Alex Spilker

Sep 26, 2024

Calibration Technician

21:33:01 -04:0

Certificate - Page 5 of 5

EBS - ETHANOL BREATH STANDARD

Sales order: 1111663404

Date: July 05, 2022

NJSP DEPT OF LAW AND PUBLIC SAFETY

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: +/-0,002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#: 302-402448282

ETHANOL IN NITROGEN

Product Expiration: May 20, 2025

COMPONENT	PPM	(BrAC)
ETHANOL NITROGEN	260.5PPM BAL	(0.100)
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	263.3	(0.101)
REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38434	260,4

^{*} CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Calibration test 283190, 283189, 283188, or 283192 dated 6th January 2022 applies

Analytical

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: ND38434-20211028, A679, A650, ND38462-20211027, ND18363-20211104, ND50144-20201218

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: May 20, 2022

APPROVED BY:

"We certify that all the cylinders for the Lot numbers identified herin are manufactured and tested within the requirements of CFR 49 part 178,65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

EBS - ETHANOL BREATH STANDARD

DRAEGER MEDICAL SYSTEMS INC.;

Sales order: 1121156486

Date: June 12, 2023

METHOD OF ANALYSIS:

IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY:

+/-0.002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#:

302-402755169

ETHANOL IN NITROGEN

Product Expiration: May 25, 2026

COMPONENT	PPW	(BrAC)
ETHANOL NITROGEN	104.2PPM BAL	(0.040)
AVERAGE ANALYTICAL VALUE	PPM	(BrAC) (0.041)
ETHANOL	107.2	
REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

^{*} CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards. Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: May 25, 2023

APPROVED BY:

"We certify that all the cylinders for the Lot numbers identified herin are manufactived and tested within the requirements of CFR 49 part 178,65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

EBS - ETHANOL BREATH STANDARD

DRAEGER MEDICAL SYSTEMS INC.;

Sales order: 1113360565 Date: August 29, 2022

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#: 302-402477284

ETHANOL IN NITROGEN

Product Expiration: June 27, 2025

COMPONENT	PPM	(BrAC)
ETHANOL NITROGEN	208,4PPM BAL	(0.080)
AVERAGE ANALYTICAL VALUE	РРМ	(BrAC)
ETHANOL	210.9	(0.081)
REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38434	260.4

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Calibration test 283192, dated 6th January 2022 or calibration test 292029, 292030 or 292031, dated 26th March 2022 applies

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: ND38434-20211028, A679, A650, ND38462-20211027, ND18363-20211104, ND50144-20201218

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: June 27, 2022

APPROVED BY:

"We certify that all the cylinders for the Lot numbers identified herin are manufactured and tested within the requirements of CFR 49 part 178,65 and that physical and chemicat test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

EBS - ETHANOL BREATH STANDARD

NJSP

Sales order: 1111788955

Date: July 14, 2022

METHOD OF ANALYSIS:

IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY:

+/-0.002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#:

302-402486005

ETHANOL IN NITROGEN

Product Expiration: July 13, 2025

COMPONENT	PPM	(BrAC)	
ETHANOL NITROGEN	416.8PPM BAL	(0.160) (BrAC) (0.161)	
AVERAGE ANALYTICAL VALUE	PPM		
ETHANOL	420.0		
REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM	
N.M.I. TRACEABLE STANDARDS*	ND38434	260.4	

^{*} CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Calibration test 283192, dated 6th January 2022 or calibration test 292029, 292030 or 292031, dated 26th March 2022 applies

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: ND38434-20211028, A679, A650, ND38462-20211027, ND18363-20211104, ND50144-20201218

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: July 13, 2022

APPROVED BY:

"We certify that all the cylinders for the Lot numbers identified herin are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

EBS - ETHANOL BREATH STANDARD

Part Number: 4401041NJ

DRAEGER MEDICAL SYSTEMS INC

Sales order: 1123022087

Date: August 18, 2023

METHOD OF ANALYSIS:

IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY:

+/-0.002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#: 302-402759888

ETHANOL IN NITROGEN

Product Expiration: May 31, 2026

COMPONENT	PPM	(BrAC)
ETHANOL NITROGEN	781.5PPM BAL	(0.300)
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	793.1	(0.304)
REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM

N.M.I. TRACEABLE STANDARDS*

ND38424

260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards. Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA). CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.


Manufactured Date: May 31, 2023

APPROVED BY:

"We certify that all the cylinders for the Lot numbers identified herin are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request.*

> CALGAZ, a division of Airgas USA LLC 821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

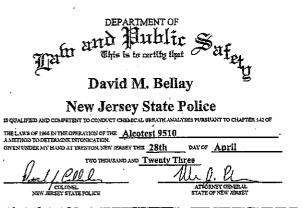


DEPARAMENT OF AND
Breath Test Coordinator/Instructor
IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSES PURSUANT TO CHAPTER 142 OF
THE LAWS OF 1945 IN THE OPERATION OF THE <u>Alcotest 9510</u> AMERINO TO DESIGNATION SHOULD AND THE PROPERTY THE 20th DAY OF AUGUST
- TWO THOUSAND AND TWENTY FOUR
bellell Will le
COLONEL ATTORNEY GENERAL STATE OF NEW PERSEY

DATE 1	Refresher Course PLACE	INSTRUCTOR
0		
5		
6.		
7.		
9		
S.P. 293B (Rev. 10/22)		
	•	
		**
	**	
-		
ORIGINAL COURS	SE DATES	
DATE	Refresher Course PLACE	INSTRUCTOR
4		•
~ -		

ORIGINAL COURSE DATES

S.P. 293B (Rev. 10/22)

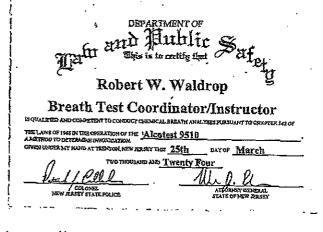

DEPARTMENT OF And Hutilic Sufety Robert W. Waldrop
New Jersey State Police
IS QUALIFIED AND COMPETENT TO CONTACT CHEMICAL BREATH ANALYSES FURSILIANT TO PROJECT A 12 OF
DEFLANCE 1966 ENTRE OFERATION OF THE Alcotest 9510
overondermendat menor nermuser des 28th Davos April
TEO PERSOND AND TWENTY Three
_ to I Cill All I &
NEW TENSET STATEPOLICE STATESON TENSET OF THE STATES OF TH

DATE	Refresher Course PLACE	INSTRUCTOR
I.		
7		
·.		
١		
·-		
	DATES	
GINAL COURSE	DATES Refresher Course PLACE	INSTRUCTOR
GINAL COURSE DATE	DATES Refresher Course PLACE	INSTRUCTOR
GINAL COURSE	DATES Refresher Course PLACE	INSTRUCTOR
GINAL COURSE DATE	DATES Refresher Course PLACE	INSTRUCTOR
GINAL COURSE	DATES Refresher Course PLACE	INSTRUCTOR

S.P. 2938 (Rev. 10/22)

Dennis J. Lutz
New Jersey State Police
IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSIS PURSUANT TO CHAPTER 142 OF
THE LAWS OF 1986 IN THE OPERATION OF THE Alcotest 9510
GIVEN UNDER LIVERALD AT TREENTON, NEW MERSEY THIS 8th DAY OF JOINE
TWO THOUSAND AND Twenty One
- V-1/800 RD
/ COLONEL ATTORNEY GENERAL NEW JENSIN STATE POLICE STATE OF WAY JESSTY
STATE OF MEN SEASON
The second secon
DEPARIMENT OF and Auhlic Safety

DEPARTMENT OF and Huhlic Safet
Dennis J. Lutz
Deams J. Luiz
Breath Test Coordinator/Instructor
IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSES PURSUANT TO CHAPTER 142 OF
HELAWS OF 1866 IN THE OPERATION OF THE ALCOTEST 9510
GREN UNDER MY HAND AT TRENTON, NEW JERSEY THIS 8th DAY OF June
TWO THOUSAND AND Twenty One
Juli Coll
NEW LEASTY STATE POLICE STATE OF NEW LEASTY ATTORNEY GENERAL STATE OF NEW LEASTY ATTORNEY GENERAL
and the second of the second o

.

.

.

.

1. Z	DATE 13/23	Refresher Course PLACE PLACE PLACE Tech	INSTRUCTOR
<u>-</u>			<u> </u>
¯			
⁴. —			
^{5.} —			
^{6.} ––			
^{7.} —			
B			
9. 	38 (Rev. 01/18)		
- 23	an fuer on o		
		····	en e en
OR		URSE DATES Refresher Cours	
OR	DATE	Refresher Cours	e INSTRUCTOR
	DATE	Refresher Cours	INSTRUCTOR
1	DATE	Refresher Cours PLACE	INSTRUCTOR
1	DATE	Refresher Cours PLACE	INSTRUCTOR
1 2 3	DATE	Refresher Cours PLACE	INSTRUCTOR
1 2 3 4	DATE	Refresher Cours PLACE	INSTRUCTOR
1 2 3 4	DATE	Refresher Cours PLACE	INSTRUCTOR
1 2 3 4 5	DATE	Refresher Cours PLACE	INSTRUCTOR
1 2 3 4 5 6	DATE	Refresher Cours PLACE	INSTRUCTOR

1